


HY-115 / JETPRO 9.3 (HY-230)

HYTORC standard electric power packs. Reliable, efficient and economical, the HY-115 will outperform any standard pump on the market. The Hydraulic Power System operates at a very quiet ~80 dB. All pumps come equipped with an Oil Cooler, making overheating a thing of the past. Simple controls make for short set-up times and the upgradeable semi-automatic feature allows the operator to experience faster and easier tightening.

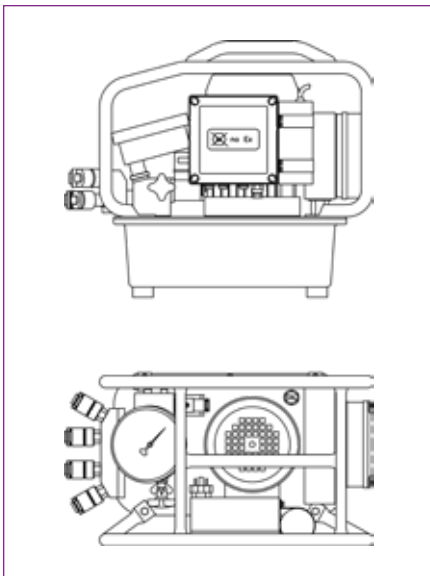

PUMP SPECIFICATIONS AND FEATURES

Power	115v (17 Amp) / 230v (9 Amp) / 400v (6 Amp)
Gauge	0-10 k PSI (+/-1% Accuracy)
Reservoir Capacity	1.35 gals. / 5.1 l (2 gals. / 7.6 l tank optional for the HY-115)
Stages	3
Weight	57 lbs. / 25.8 kg
Maximum Oil Flow Rate	620 cu. in./min. / 10 l/min.
Oil Cooler	Yes
Protective Caging	Yes
15' Remote Control	Yes
15' Twin Line Steel Braided Hydraulic Hose	Yes

HYTORC

Headquarters:
333 Route 17 N., Mahwah, NJ 07430
+1-201-512-9500

Email:
info@hytorc.com

Phone:
1-800-FOR-HYTORC

Online:
hytorc.com