



LITHIUM SERIES II

SMALL TOOL.
BIG POWER.



DUAL SPEED

Rundown and Torque modes make bolting faster. Get bolts snug without needing a second tool.

TORQUE, ANGLE & POWER

- Extra high torque (up to 8,000 ft.-lbs.) packed into a handheld, cordless tool.
- Torque & Angle functionality for your convenience.



MULTIFUNCTIONAL & VERSATILE


One tool. Three ways to bolt with it. Use the LST with the HYTORC Washer, HYTORC Nut, and reaction arms.





**WE GIVE YOU THE POWER TO
FINISH TOUGH JOBS FASTER
OUT IN THE FIELD.**

Get **36V battery-powered convenience** without giving up torque capacity. Our award-winning cordless torque tool is easy to use, combining a rugged body, impressive durability, and smart features that help ensure you bolt faster and safer.

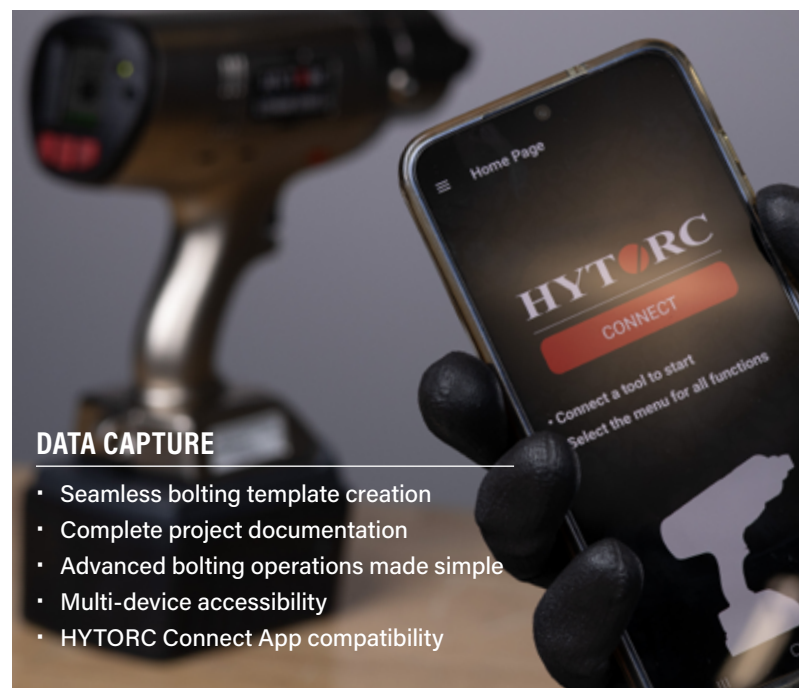

DATA CAPTURE

- Seamless bolting template creation
- Complete project documentation
- Advanced bolting operations made simple
- Multi-device accessibility
- HYTORC Connect App compatibility



WHAT COMES WITH YOUR KIT

- LITHIUM SERIES II Tool
- Reaction Arm
- Battery Charging System
- Storage Case
- 36V Battery Pack (2)
- Side Handle
- Calibration Certificate
- Operations Manual



THE MOST ADVANCED ELECTRIC TORQUE TOOL FOR HEAVY-DUTY BOLTING.

FULL SPECIFICATIONS

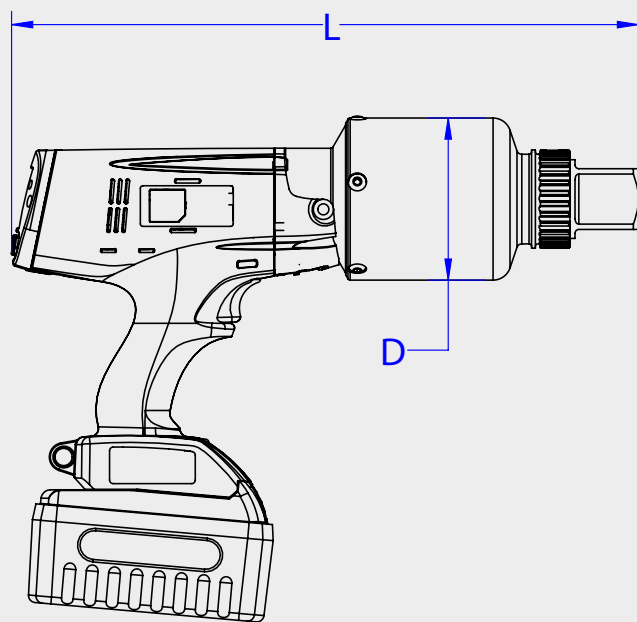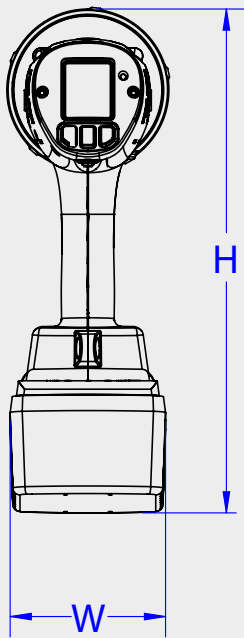

LEGEND: H = HEIGHT W = WIDTH L = LENGTH D = DIAMETER

CONFIGURATION	H		W		L		D		SQUARE DRIVE	WEIGHT*		SNUG MIN		SNUG MAX		TORQUE MIN		TORQUE MAX	
	in	mm	in	mm	in	mm	in	mm		lbs	kg	ft-lbs	Nm	ft-lbs	Nm	ft-lbs	Nm	ft-lbs	Nm
LST-0250	11.7	297	3.8	97	9.9	251	2.5	64	1/2	9.1	4.1	12	16	24	33	25	34	250	339
LST-0700	11.7	297	3.8	97	11.4	290	2.6	66	3/4	11.3	5.1	35	47	149	202	150	203	700	949
LST-1200	11.7	297	3.8	97	11.7	297	2.6	66	3/4	11.6	5.3	60	81	199	270	200	271	1,200	1627
LST-2000	12.0	305	3.8	97	13.9	353	3.2	81	1	16.2	7.3	100	135	324	439	325	440	2,000	2712
LST-3000	12.1	307	3.8	97	14.4	366	3.4	86	1	17.3	7.8	150	203	499	676	500	677	3,000	4067
LST-5000	12.4	315	4.0	102	15.4	391	4.0	102	1-1/2	22.0	10.0	200	270	799	1,083	800	1085	5,000	6779
LST-8000	12.6	320	4.4	112	16.0	406	4.4	112	1-1/2	26.4	12.0	400	542	1,299	1,761	1,300	1763	8,000	10847

*w/ battery.

SCAN TO SEE ALL PRODUCT FEATURES



HYTORC owns all content, copyrights, trademarks and patents in this document. © 2026 HYTORC. Any unauthorized use or distribution of any material from this document is strictly prohibited.

Headquarters:
333 Route 17 N., Mahwah, NJ 07430
+1-201-512-9500

Contact:
1-800-FOR-HYTORC
info@hytorc.com

Online:
hytorc.com